



# Monitor

QuietBack™ Carpet Tiles

acoufelt  
making quiet




# Product Detail

Application	Floor
Composition	QuietBack™
Material	100% solution dyed nylon
Style	Multi-level textured loop pile
Recycled content	Backing made from >80% recycled PET
Tile dimensions	250 x 1000mm
Thickness	8mm +/- 10%
Tiles per box	20

# Guarantees

Wear warranty	20 years*
Castor chair proof	20 years*
Anti-static	Lifetime*
Colorfast	20 years*
Classification	Commercial Extra Heavy Duty
*conditions apply	

# Installation Method

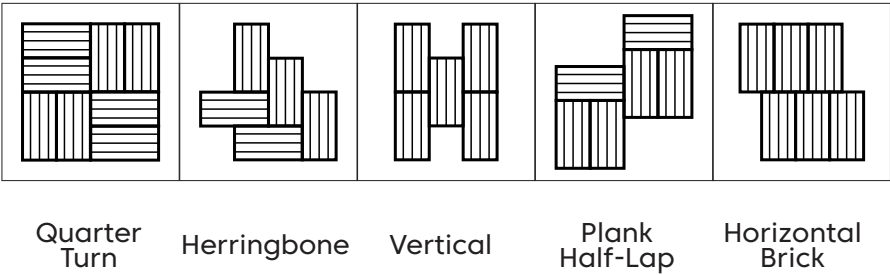

# Technical Data

Dimensional stability	ISO 17984, -0.05%
Electrostatic propensity	AATCC 134, < 0.70 kW
Color fastness	ISO 105-B02, 6-7
Thermal resistance	0.2m² K/W
Fire test method	AS/ISO 9239.1-2003
Critical heat flux	Mean result 4.9kW/m²
Smoke deviation rate	Mean result 187%.min
Fire test method	ASTM E648
Classification	Class 1
Critical heat flux	Average, 0.54kWm²
Smoke density test method	ASTM E662 (Flaming)
Smoke density test rate	450 or less
Fire test method	EN ISO 9239
Critical heat flux	Cfl
Smoke deviation rate	s1
Antimicrobial effectiveness	AATTCC Method 174:2016 Part II, <100

# Sustainability

Backing made from 80% min. recycled content


Generated using 40% solar energy

Total VOC's less than 0.5 mg/m³ (3<sup>rd</sup> Party Verified)

Red List Free Declare Label (3<sup>rd</sup> Party Verified)

Phenol & formaldehyde free

# Acoustic Performance

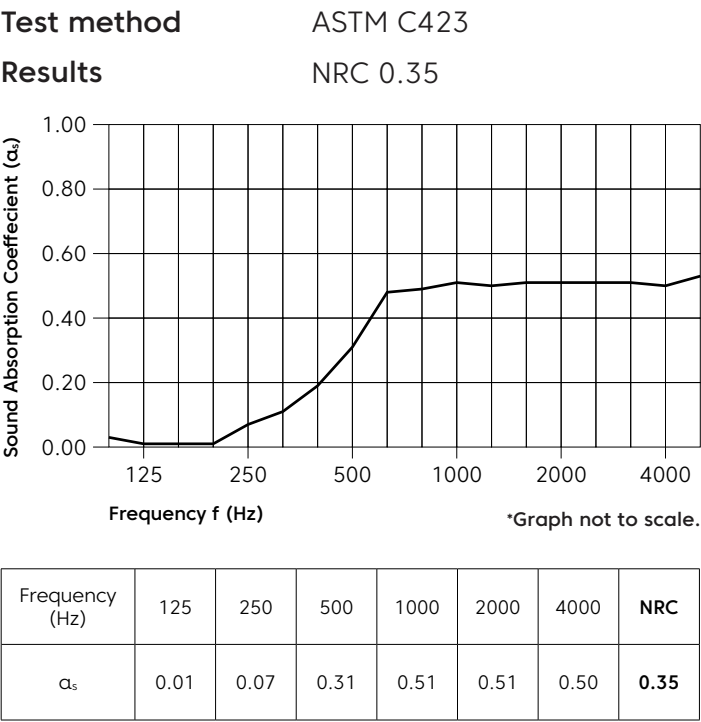

# QuickShip


QuickShip Rapid




QuickShip Rapid products can be despatched within 1-2 days.

# Colorways


Light Reflectance Values (LRV), are **a measure of the percentage of visible and usable light that is reflected from a surface** when illuminated by a light source.

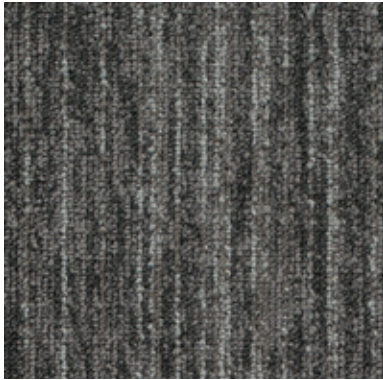


Channel  
LRV – 6.68%

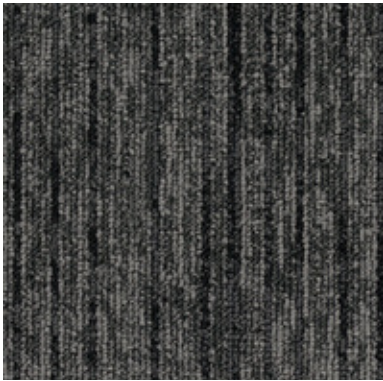

Circuit  
LRV – 5.29%

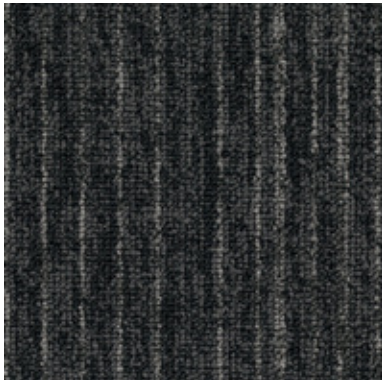

Control  
LRV – 4.38%

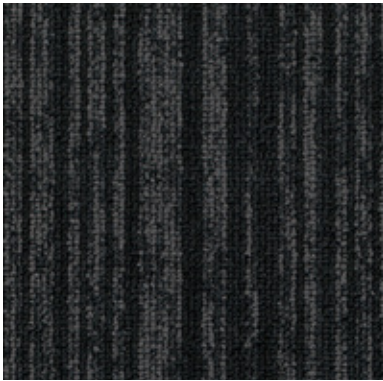

Cable  
LRV – 2.90%




Cable Red  
LRV – 3.55%



Cable Blue  
LRV – 3.01%



Cable Orange  
LRV – 4.91%

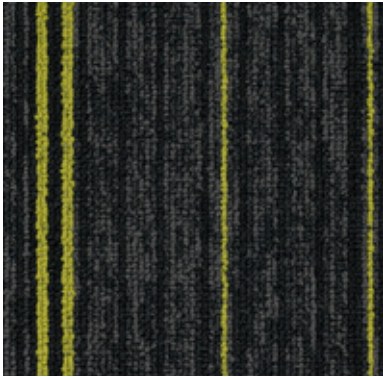

Cable Green  
LRV – 3.37%