

Screens

FilaSorbTM 12




Product Detail

Technical Data

Application	Wall		
Composition	100% polyester		
Material	FilaSorb™		
Recycled content	60% min		
Dimensions	1220 x 2760mm		
	Custom size available upon request		
Thickness	12mm +/- 10%		

Fire rating	AS/ISO 9705.1, Group 1
	ASTM E84-17a, Class A
	EN 13501-1: 2019, B-s1, d0
Indoor air quality	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017, ≤ 0.5mg/m³
Color fastness	ISO 105-B02, 6-7

Test method Results

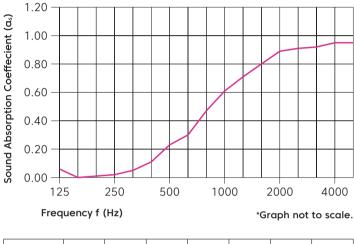

Frequency (Hz)	125	
a₅ no air gap	0.06	

Guarantees

Warranty against defects 20 years* Light fastness warranty 20 years*

*conditions apply

QuickShip

QuickShip Standard (Made to Order)



Our standard made to order products have an approx. 2-3 week lead time from payment and order confirmation.

2 - Screens | 1800 626 462 | acoufelt.com

Sustainability



Made from 60% min. recycled content



Generated using 40% solar energy



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)







Red List Free Declare Label (3rd Party Verified)



Se la companya de la comp

Recyclable at end-of-life



Phenol & formaldehyde free


Acoustic Performance

ISO 354-2006 NRC 0.45 (no air gap)

250	500	1000	2000	4000	NRC
0.02	0.23	0.61	0.89	0.95	0.45



Designs

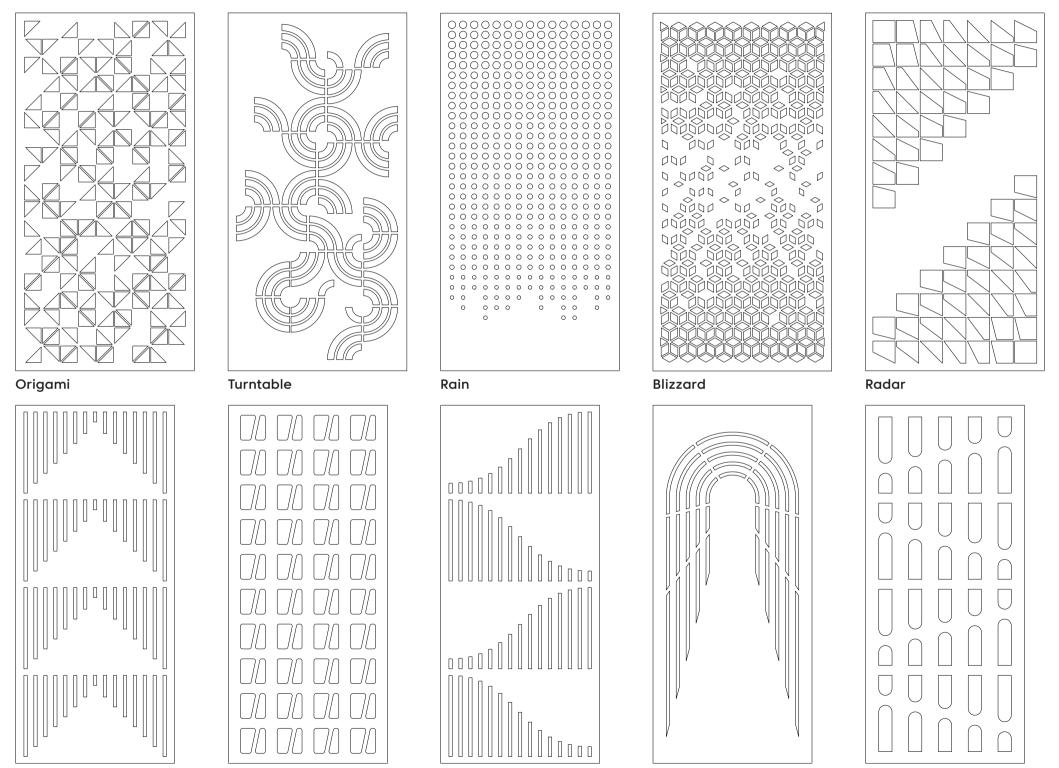

Pyramid


3 – Screens | 1800 626 462 | acoufelt.com

Skyscraper

Sonar


Tunnel

Waterfall

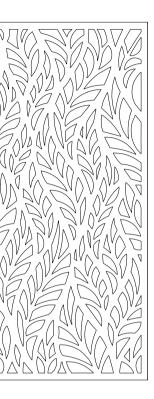

lΩ,

Fern

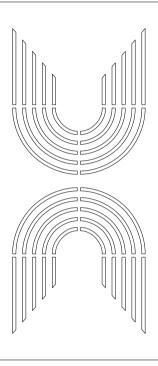

Insignia



Colorways

Light Reflectance Values (LRV), are **a measure of the percentage of visible and usable light that is reflected from a surface** when illuminated by a light source.







Peacock LRV – 19.00%



Turmeric LRV – 29.59%

Grey 27.00%



Popcorn LRV – 65.00%




Azur LRV – 18.00%




Metal LRV – 35.00%



Mounting Methods

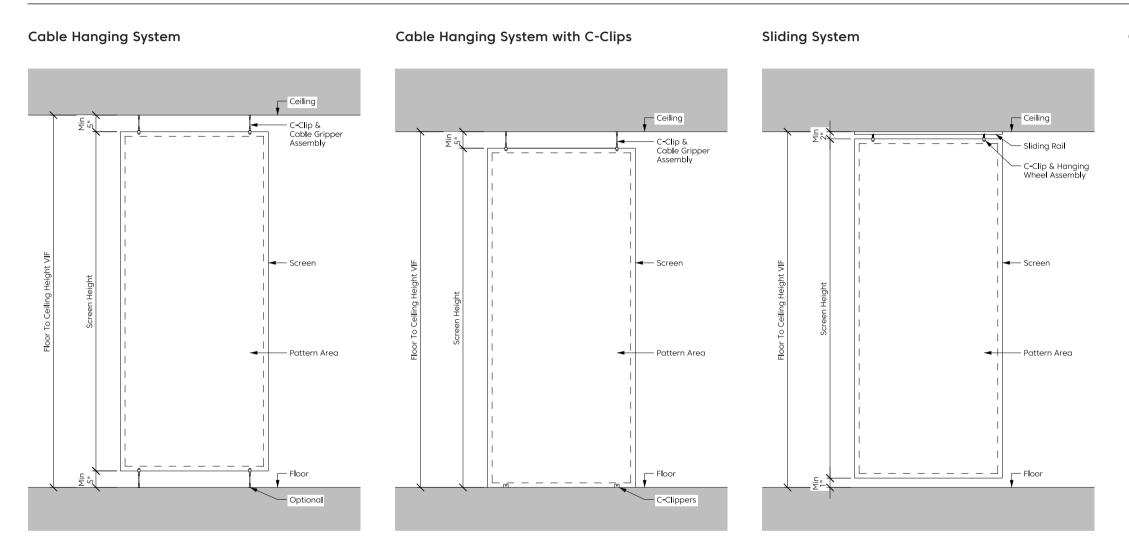

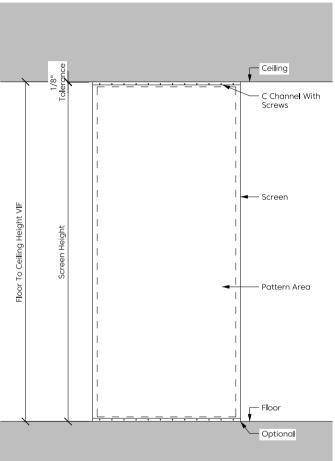

C Channel System

